

# SUBMITTAL DATA SHEET



Series Name: **Mini Split 21seer Series**

Model Number: **AO21-09N1-M1 / AW21-09N1-M1**

Wall Mounted Heat Pump System	
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____



INDOOR SPECIFICATION		
Indoor Air Flow (H/M/L) (CFM)		246/176/141
Indoor Noise Level (H/M/L) (dBA)		37/28/20
Dimension (W×D×H)	inch	28-3/4 x 7-7/8 x 11-1/2
	mm	729 x 200 x 292
Package (W×D×H)	inch	31-1/8 x 10-5/8 x 14-3/4
	mm	790 x 270 x 375
Net/Gross Weight	lbs	18/22
	kg	8.0/10.2


OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Refrigerant		R410A
Factory Charge		310ml
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1294
Outdoor Noise Level (dBA)		54.5
Dimension (W×D×H)	inch	30-1/8 x 11-7/8 x 21-7/8
	mm	765 x 303 x 555
Package (W×D×H)	inch	34-7/8 x 13-1/4 x 24
	mm	887 x 337 x 610
Net/Gross Weight	lbs	55/61
	kg	25.0/27.6

EFFICIENCY			
Cooling		Heating	
<b>SEER2</b>	21.7	<b>HSPF2-4</b>	9.4
<b>EER2</b>	12.6	<b>COP</b>	3.2
PERFORMANCE of Cooling			
Cooling (Btu/hr)			
Rated Capacity		9000	
Min/Max Capacity		2900~10500	
Moisture Removal		0.945 L/H (2.0pint/H)	
Standard Operating Range		5°F~122°F (-15°C~50°C)	
Rated Cooling Conditions:		Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB	
PERFORMANCE of Heating			
Heating (Btu/hr)			
1. @ 47°F Rated (Min/Max)		10000(2400~10500)	
2. @ 17°F Rated		6000	
3. @ 5°F Max: Capacity / COP		7000 / 2.00	
Standard Operating Range		5°F~75°F (-15°C~24°C)	
1. Rated Heating Conditions:		Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:		Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor Operating at Max. Frequency		Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB	

ELECTRICAL	
Power Supply	208/230V, 1Ph, 60Hz
System MCA	12
Connection Wiring	AWG 14-4
System MOCP	15
Compressor RLA	7
Outdoor Fan Motor RLA	0.8
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	0.2
Indoor Fan Motor W	13
System Power Input @ Cooling (W)	715(220~950)
System Power Input @ Heating (W)	905(190~1160)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Liquid Size	1/4in (6.35mm)
Gas Size	3/8in (9.52mm)
Drain Size	5/8in (15.88mm)
Max. Piping Length	82ft (25m)
Max. Height Difference	32.8ft (10m)
Max. Pre-charged Length	25ft (7.5m)
Refrigerant Pre-charged Amount	25.4oz (720g)
Additional Charge of Refrigerant	0.16oz/ft (15g/m)
Connection Method	Flared


## Indoor Unit Dimension

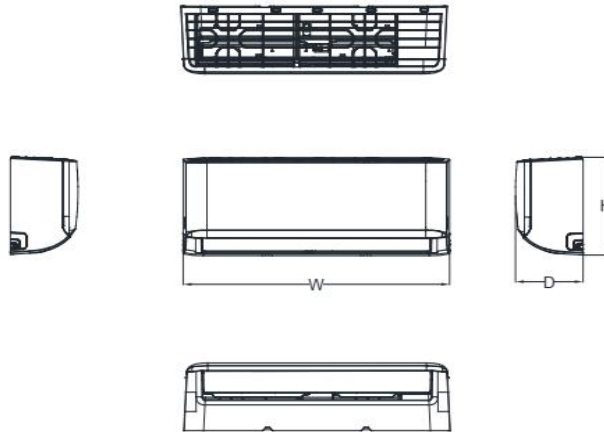

Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)
6K~11K	A	729/28.7	200/7.87	292/11.5
8K~14K	B	802/31.57	200/7.87	295/11.61
12K~21K	C	971/38.23	228/8.98	321/12.64
18K~28K	D	1082/42.6	234/9.21	337/13.27
27K~36K	F	1259/49.57	283/11.14	362/14.25



## Installation Instruction

Refer to the following diagram to ensure proper distance from walls and ceiling:

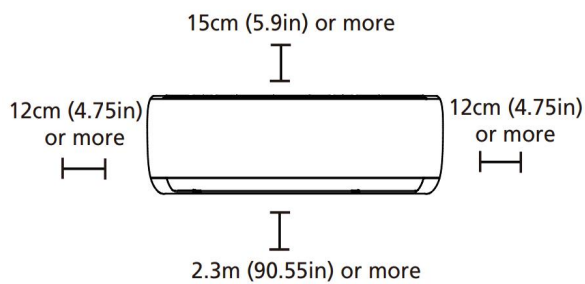


### NOTE ON PIPING ANGLE

Refrigerant piping can exit the indoor unit from four different angles: Left-hand side, Right-hand side, Left rear, Right rear.

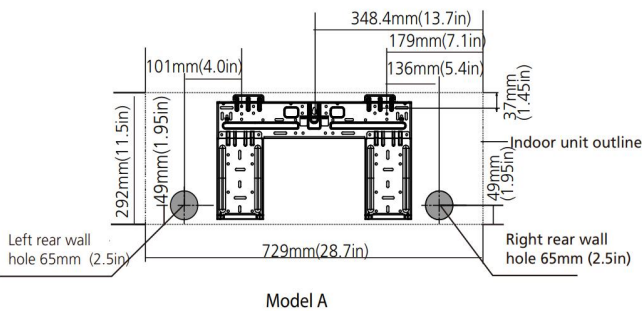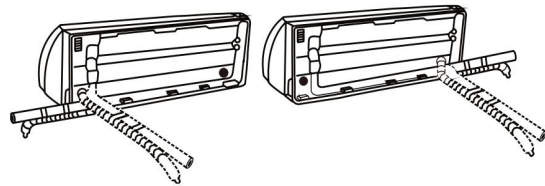

**NOTE:** When the gas side connective pipe is  $\Phi$  16mm (5/8in) or more, the wall hole should be 90mm (3.54in).

**Outdoor Unit Dimension**

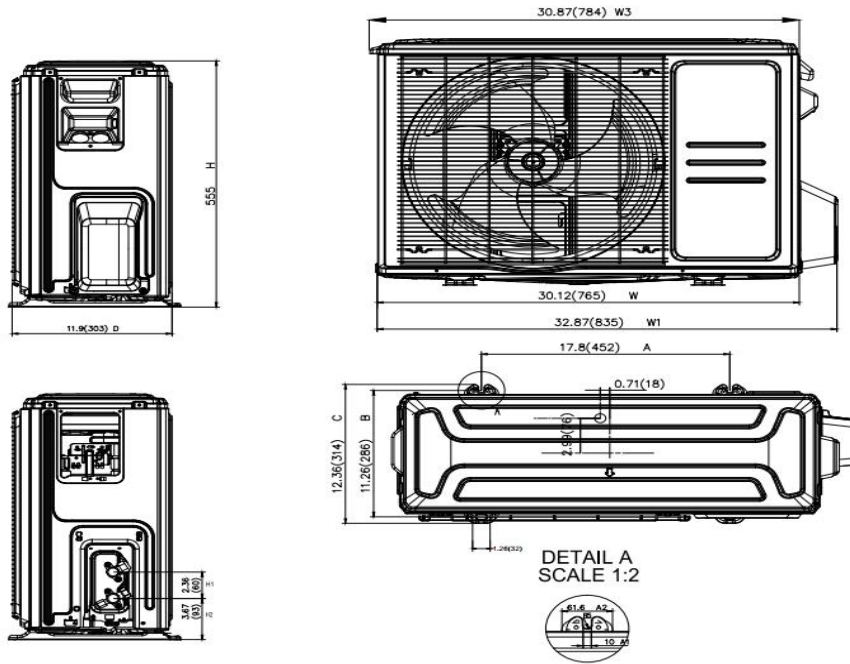

**Installation Instruction**

Install the unit by following local codes and regulations, there may be differ slightly between different regions.

