

SUBMITTAL DATA SHEET




Series Name: **Mini Split 24seer Series**
 Model Number: **AO24-18N1-M1H / AW25-18N1-M1**

Wall Mounted Heat Pump System

Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____

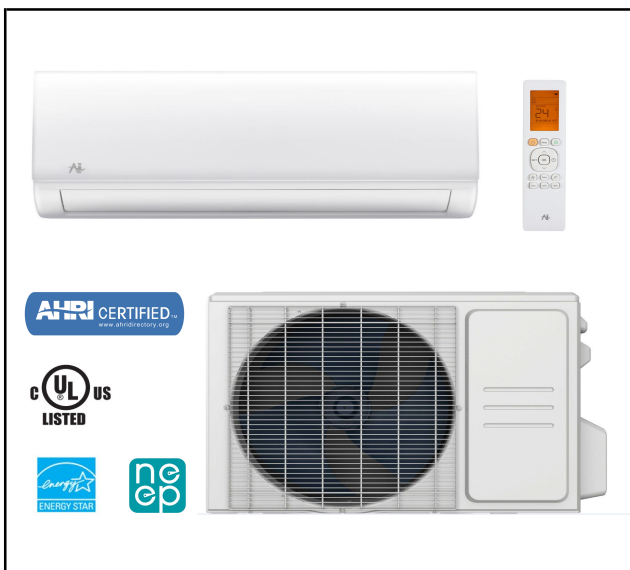

INDOOR SPECIFICATION		
Indoor Air Flow (H/M/L) (CFM)		761/531/459
Indoor Noise Level (H/M/L) (dBA)		45.5/41/24.5
Dimension (WxDxH)	inch	42-5/8 x 9-1/4 x 13-1/4
	mm	1082 x 234 x 337
Package (WxDxH)	inch	45-1/2 x 16-3/8 x 12-3/8
	mm	1155 x 415 x 315
Net/Gross Weight	lbs	30/38
	kg	13.4/17


OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Refrigerant		R410A
Factory Charge		440ml
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2059
Outdoor Noise Level (dBA)		58.8
Dimension (WxDxH)	inch	35 x 13-1/2 x 26-1/2
	mm	890 x 342 x 673
Package (WxDxH)	inch	39-1/8 x 15-5/8 x 29-1/8
	mm	995 x 398 x 740
Net/Gross Weight	lbs	94/101
	kg	42.8/45.8

EFFICIENCY			
Cooling		Heating	
SEER2	24	HSPF2-4	10.5
EER2	13.5	COP	3.7
PERFORMANCE of Cooling			
Cooling (Btu/hr)			
Rated (Min/Max)		18000	
Sebsible @ AHRI		7320~19500	
Moisture Removal		1.55 L/H (3.3pint/H)	
Standard Operating Range		-13°F ~122°F (-25°C~50°C)	
Rated Cooling Conditions: Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB			
PERFORMANCE of Heating			
Heating (Btu/hr)			
1. @ 47°F Rated (Min/Max)		18000(6620~21200)	
2. @ 17°F Rated		14100	
3. @ 5°F Max: Capacity / COP		12800 / 2.44	
Standard Operating Range		-13°F ~75°F (-25°C~24°C)	
1. Rated Heating Conditions: Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB			
2. Rated Heating Conditions: Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB			
3. Heating Conditions, Compressor Operating at Max. Frequency Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB			

ELECTRICAL	
Power Supply	208/230V, 1Ph, 60Hz
System MCA	19
Connection Wiring	AWG 14-4
System MOCP	30
Compressor RLA	12
Outdoor Fan Motor RLA	0.76
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	0.25
Indoor Fan Motor W	58
System Power Input @ Cooling (W)	1333(560~1748)
System Power Input @ Heating (W)	1410(460~1964)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Liquid Size	1/4in (6.35mm)
Gas Size	1/2in (12.7mm)
Drain Size	5/8in (15.88mm)
Max. Piping Length	98.4ft (30m)
Max. Height Difference	65.6ft (20m)
Max. Pre-charged Length	25ft (7.5m)
Refrigerant Pre-charged Amount	56.44oz (1600g)
Additional Charge of Refrigerant	0.16oz/ft (15g/m)
Connection Method	Flared


Indoor Unit Dimension

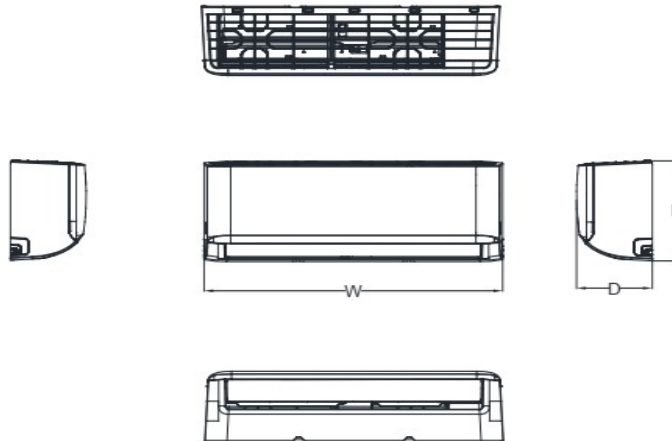

Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)
6K~11K	A	729/28.7	200/7.87	292/11.5
8K~14K	B	802/31.57	200/7.87	295/11.61
12K~21K	C	971/38.23	228/8.98	321/12.64
18K~28K	D	1082/42.6	234/9.21	337/13.27
27K~36K	F	1259/49.57	283/11.14	362/14.25



Installation Instruction

Refer to the following diagram to ensure proper distance from walls and ceiling:

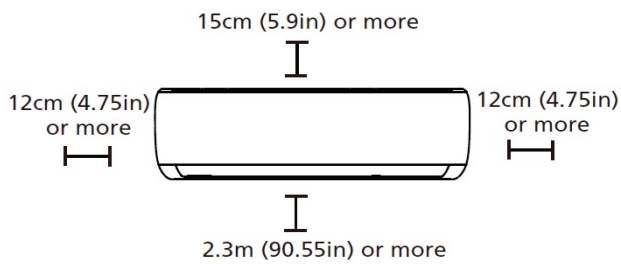


NOTE ON PIPING ANGLE

Refrigerant piping can exit the indoor unit from four different angles: Left-hand side, Right-hand side, Left rear, Right rear.

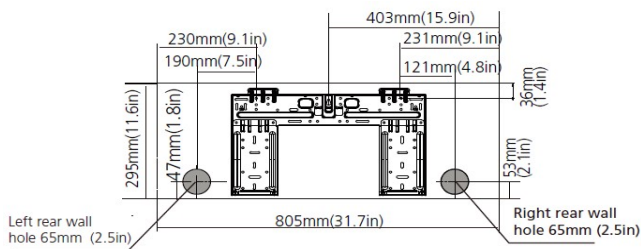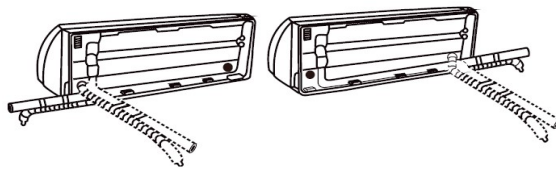

NOTE: When the gas side connective pipe is Φ 16mm(5/8in) or more, the wall hole should be 90mm(3.54in).

Outdoor Unit Dimension

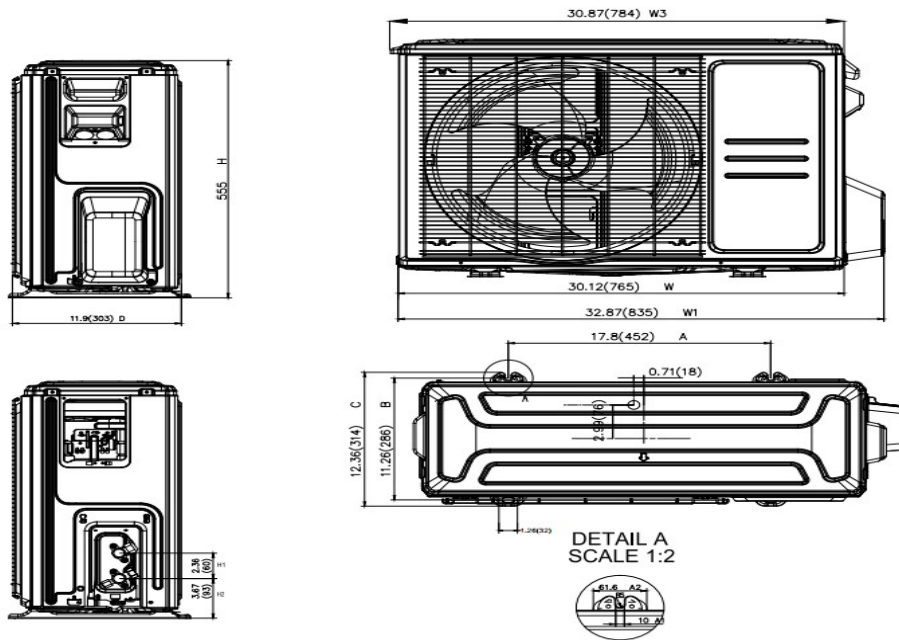

Installation Instruction

Install the unit by following local codes and regulations, there may be differ slightly between different regions.

