

SUBMITTAL DATA SHEET



Series Name: **INNOVA 24V Regular with A Coil**

Model Number: **AUO17-24N1-M3 / AUA-24N1-A18**

Heat Pump System

Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Approval: _____
 Date: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____



INDOOR SPECIFICATION		
Indoor Air Flow (H/M/L) (CFM)		0/706/0
Indoor Noise Level (H/M/L) (dBA)		0/0/0
Dimension (W×D×H)	inch	21 x 14-1/2 x 18
	mm	534 x 368 x 457
Package (W×D×H)	inch	17-5/8 x 26-1/8 x 20-1/2
	mm	447 x 662 x 522
Net/Gross Weight	lbs	42/47
	kg	18.9/21.1


OUTDOOR SPECIFICATION		
Compressor Type		Twin-ROTARY
Refrigerant		R410A
Factory Charge Oil		670ml
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1765
Outdoor Noise Level (dBA)		59
Dimension (W×D×H)	inch	35 x 13-1/2 x 26-1/2
	mm	890 x 342 x 673
Package (W×D×H)	inch	39-1/8 x 15-5/8 x 29-1/8
	mm	995 x 398 x 740
Net/Gross Weight	lbs	102/109
	kg	46.4/49.5

EFFICIENCY			
Cooling		Heating	
SEER2	15.4	HSPF2-4	9.2
EER2	10.0	COP	3.3
PERFORMANCE of Cooling			
Cooling (Btu/hr)			
Rated Capacity	24000		
Min/Max Capacity	8200~27400		
Moisture Removal	3.02 L/H (6.4 pint/H)		
Standard Operating Range	5°F~122°F (-15°C~50°C)		
Rated Cooling Conditions:		Indoor: 80°F DB/67°F WB	
		Outdoor: 95°F DB/75°F WB	
PERFORMANCE of Heating			
Heating (Btu/hr)			
1. @ 47°F Rated (Min/Max)	26000(9900~32000)		
2. @ 17°F Rated	22600		
3. @ 5°F Max: Capacity / COP	16000 / 2.00		
Standard Operating Range	-13°F~75°F (-25°C~24°C)		
1. Rated Heating Conditions:		Indoor: 70°F DB/60°F WB	
		Outdoor: 47°F DB/43°F WB	
2. Rated Heating Conditions:		Indoor: 70°F DB/60°F WB	
		Outdoor: 17°F DB/15°F WB	
3. Heating Conditions, Compressor		Indoor: 70°F DB/60°F WB	
Operating at Max. Frequency		Outdoor: 5°F DB/5°F WB	

ELECTRICAL	
Power Supply	208/230V, 1Ph, 60Hz
Outdoor/Indoor MCA	19/NA
Connection Wiring	/
Outdoor/Indoor MOCP	30/NA
Compressor RLA	14
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	2400(330~3000)
System Power Input @ Heating (W)	2324(520~3100)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Liquid Size	3/8in (9.52mm)
Gas Size	3/4in (19mm) ODU Adaptor from 5/8 to 3/4
Drain Size	5/8in (15.88mm)
Max. Piping Length	164ft (50m)
Max. Height Difference	82ft (25m)
Max. Pre-charged Length	25ft (7.5m)
Refrigerant Pre-charged Amount	74.08oz (2100g)
Additional Charge of Refrigerant	0.69oz/ft (65g/m)
Connection Method	Flared

Indoor Unit Dimension

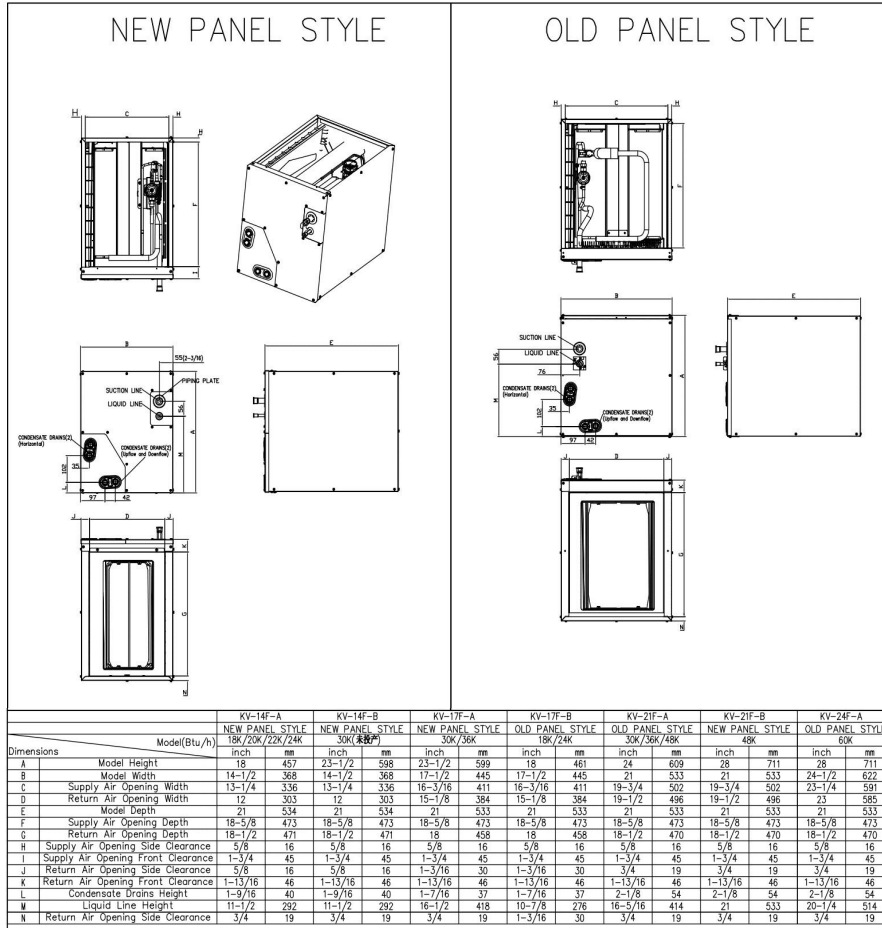

Outdoor Unit Dimension

