




Model Number: AC-18N2-M1


Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

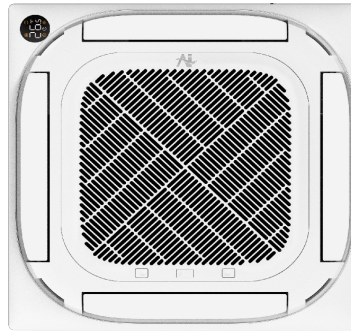


Item	Unit	Specification
<b>Performance Data</b>		
Cooling Capacity	Btu/h	16000(7000~18500)
Heating Capacity	Btu/h	19000(8700~20000)
Design Pressure	PSIG	550/340
Refrigerant Type	-	R454B
Liquid Side	inch(mm)	1/4in (6.35mm)
Gas Side	inch(mm)	1/2in (12.7mm)
Indoor Operation Range of Cooling	Deg.°F (°C)	60°F~90°F (16°C~32°C)
Indoor Operation Range of Heating	Deg.°F (°C)	32°F~86°F (0°C~30°C)
<b>Electrical</b>		
Normal Operational Voltage	V, Hz, Ph	208/230V,60Hz,1Ph
Voltage Range	V	187-253
Connection Wiring	-	AWG 14-4
Indoor Fan Motor Model	-	ZKFN-45-8-2
Indoor Fan Motor Output	W	45
Indoor Fan Motor RLA	A	1.0
Indoor Fan Motor Speed(Hi/Mi/Lo)	r/min	800/750/700
<b>Air Flow &amp; Noise Level</b>		
Indoor Air Flow (Turbo/Hi/Mi/Lo/Si)	CFM	447/389/318/194/147
Indoor Noise Level (Turbo/Hi/Mi/Lo/Si)	dB(A)	48/45/41/28/24
Moisture Removal	L/H (pint/H)	2.00L/H (4.22pint/H)
Dimension (W×D×H)	inch	22-1/2 x 22-1/2 x 9-5/8
	mm	570 x 570 x 245
Package (W×D×H)	inch	28-1/8 x 25-1/4 x 11-5/8
	mm	715 x 640 x 295
Net Weight / Gross Weight	lbs	35/42
	kg	16/19

## Indoor Unit Dimension

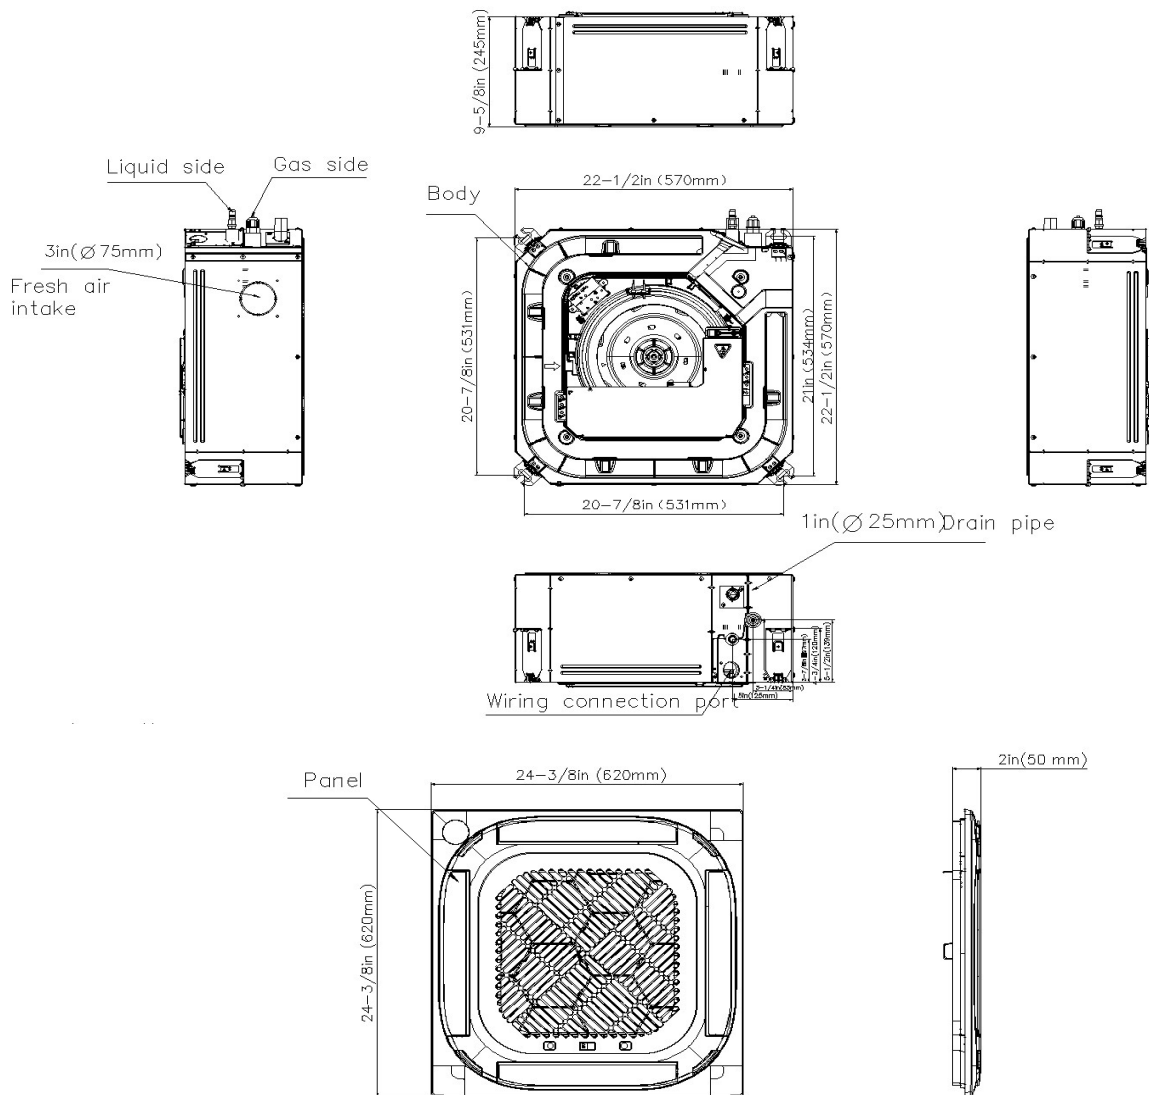

## Installation Instruction

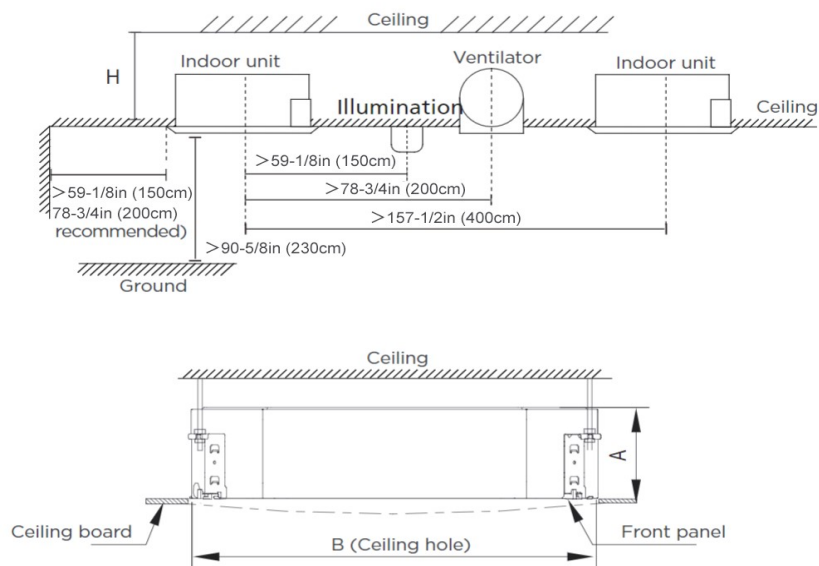

Distance from ceiling relative to height of indoor unit

MODEL	Length of A	Length of H	Length of B
9K/12K/18K	9-5/8in (245mm)	$>10-7/8\text{in}$ (275mm)	23-5/8in (600mm)
24K	8-1/8in (205mm)	9in (230mm)	
36K	9-5/8in (245mm)	10-5/8in (271mm)	35-3/8in (900mm)
48K	11-1/4in (287mm)	12-3/8in (313mm)	

## FEATURES

- 360° Air Flow
- Built-in remote on-off and alarm terminals
- Refrigerant leakage detector(Optional)
- Humidity sensor
- Built-in water pump
- 1~100% stepless adjustable fan speed setting
- WiFi capability: through WiFi module or wired controller with WiFi function
- OTA function: can upgrade the program version anytime
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple controller options available:
  - Optional two way communication wired controller, programmable:120N(X6)
  - Optional two way communication wired controller, programmable, with built-in WiFi, :120N(X6W)
  - Optional Infrared wired controller: 120L
  - Standard Wireless remote controller
  - Optional 24V interface kit, can connect with Third-Party 24V Thermostat