

Model Number: TL04-1

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____

Construction: _____

Unit #: _____




Drawing #: _____



SPECS


Code		17212000002948
Model		TL04-1
Power Supply	V	HA-HB: Max 20Vdc R-Rc: 24Vac
Product Size (WxDxH)	inch	4 x 1 x 4
	mm	102.5 x 24.6 x 102.5
Net Weight	lbs	0.45
	kg	0.2
Ambient Temperature	°F	32 - 95
	°C	0 - 35
Ambient Humidity	RH	30%-80%
Material	Front Panel	Glass
	Back Cover	PC/ABS

Dimension

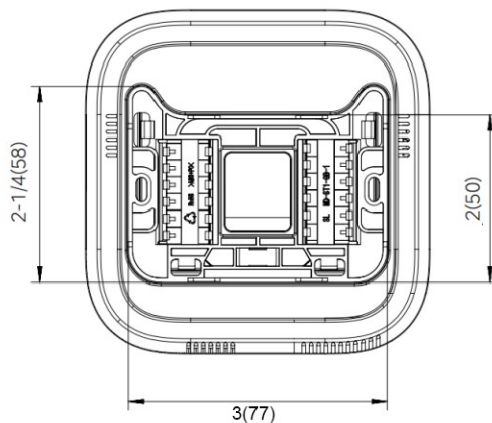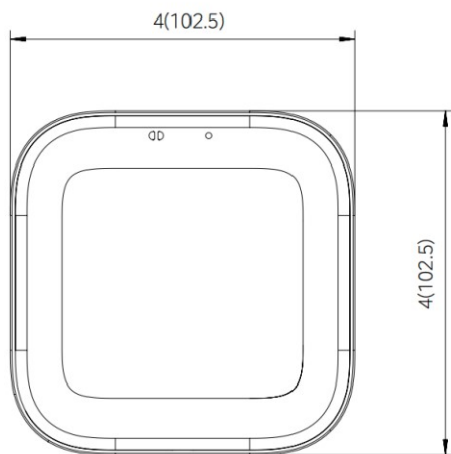

unit: inch (mm)

Display

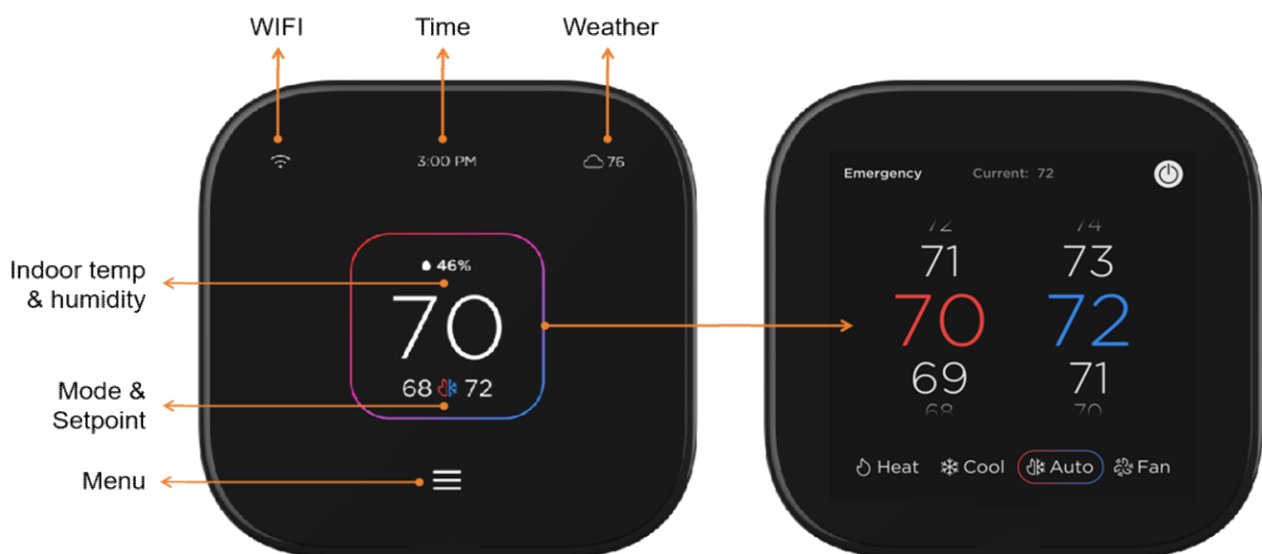

Compatibility Chart

	All Easy Pro	INFINI	Console	1-way cassette	4-way cassette	Ceiling&Floor	Slim duct	2nd Gen. AHU	3rd Gen. AHU	Wall Mounted AHU	Pancake	A-Coil
	Yes*	Yes*	Yes*	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

*Need to match 24V mini box

Feature and function

Basic functions

- 7-Day Programmable
- TFT 4 inch touch screen
- Temperature and humidity sensor
- Motion sensor (Detection distance: 1m)
- Schedule
- App remote control
- Fahrenheit/Celsius
- Screen Clean
- Speaker
- Weather Forecast
- Comfort Presets
- Vacation
- OTA

HA HB Communication

- Mode: Dual Auto-Heat-Cool-Fan-Emergency Heat
- Fan speed: Auto-Low-Med-High
- Dehumidification
- iCheck
- iService
- Update IDU software
- Freeze Protection

R Rc 24V

- Conventional (2H/2C)-Boiler, Furnace, electric (2 stage heating)
- Heat pumps (2 stage heat pump + 2 stage aux heat) (4H/2C). Dual-Fuel support.
- Wires detection
- Mode: Dual Auto-Heat-Cool-Emergency Heat